



DK SERIES

DK751DN5


75" 4000 nits UHD Dual-sided Outdoor Kiosk




DUAL-SIDED
DESIGN



SUNLIGHT
VIEWABLE IMAGE



LOW POWER
CONSUMPTION



VIEWABLE WITH
POLARIZED LENSES



WEATHER
PROOF

FOR MORE INFORMATION


For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan

SPECIFICATION

| | | |
|-------------------------|------------------------------------|---------------------------------|
| MODEL | DK751DN5 | |
| DISPLAY | LCD Panel Size | 74.52" inches LCD (x2) |
| | Native Resolution | 3840 x 2160 |
| | Brightness | 4,000 nits |
| | Light Lifetime (Typ.) | 100,000 hrs |
| | Contrast Ratio | 3000 : 1 |
| | Color Depth | 10 bits |
| | Response Time (Typ.) | 8 ms |
| | Viewing Angle | 178° / 178° |
| | Polarized Sunglasses Support | Yes |
| | Touch Function (Optional) | P-Cap touch |
| POWER | Power Supply | Internal |
| | Rated Voltage | 200-240V ~ 50/60HZ |
| | Power On Mode (Typ./ Max) | 850W / 1850W |
| MECHANICAL SPECS | Bezel Width (T/B/L/R) | 97.6 / 137.6 / 122.1 / 122.1 mm |
| | Cabinet Color | Black |
| | Dimension (LxHxD, w/o stand) | 1175.7 x 1962.1 x 250.0 mm |
| | Weight | 415 kg |
| | Orientation | Portrait |
| | Reserved Space for Optional Player | Yes |
| | High Security Lock | Yes |
| USER INTERFACE | Language | English |
| | Support SNMP (Up to V3.0) | Yes |
| | Local Dimming Control | Yes |
| | Ambient Light Sensor | Yes |
| | Power On/Off Scheduling | Yes |
| | Internal Temperature Sensor | Yes |
| | Backup Player Build-in | Yes |
| INPUT | HDMI | x6 (2160p) |
| | Display Port | x2 |
| | USB 3.0 | x2 |
| | Micro SD Slot | x2 |
| OUTPUT | Audio | x2 |
| EXTERNAL CONTROL | RS-232 | In x2 |
| | RJ-45 | x4 (LAN) |
| INTERNAL PLAYER | Operating System | Android 8.0.0 |
| | Processor | Dual-core A73 and dual-core A53 |
| ENVIRONMENT | Operating Temperature | -30° C ~ 50° C |
| | Storage Temperature | -20° C ~ 60° C |
| | Humidity | 10% ~ 100% RH Non-condensing |
| | Environmental Rating | IP56 / IK10 / ASTM G155 |
| CERTIFICATION | CE / FCC / UL / ROHS | |

DIMENSIONS

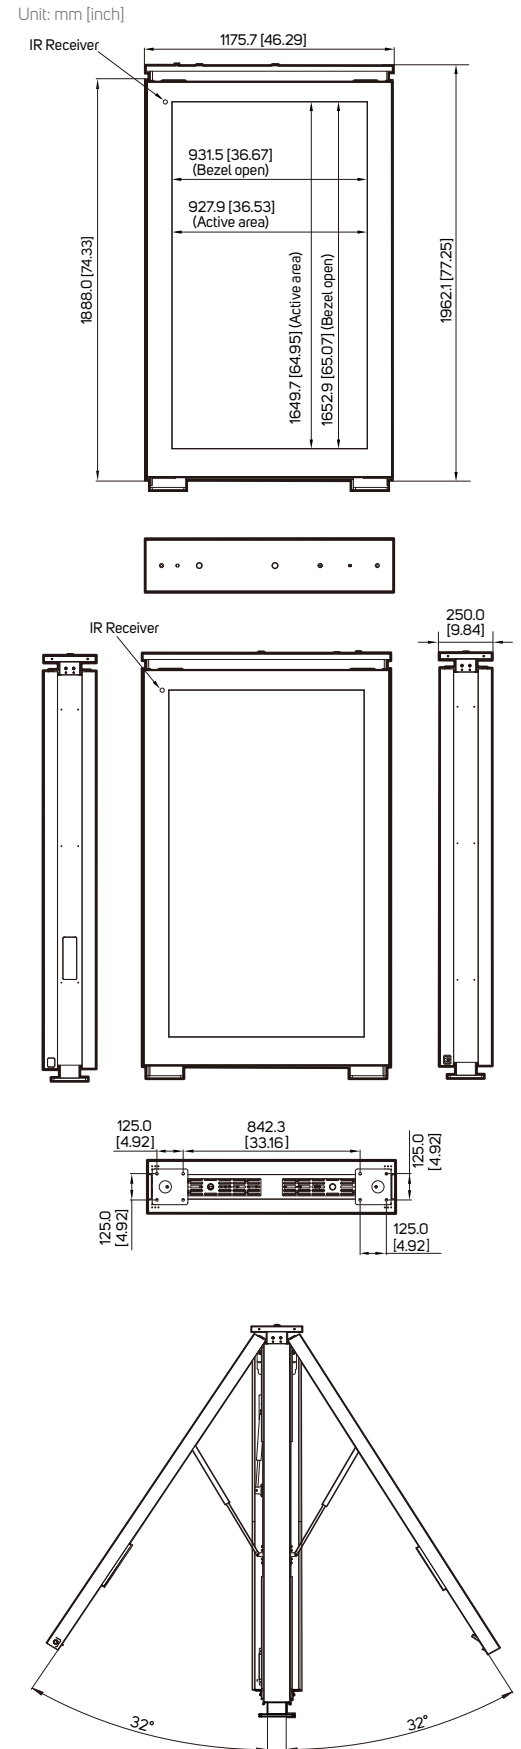

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan